

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000386

International filing date: 04 February 2005 (04.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: GB 0402654.8  
Filing date: 06 February 2004 (06.02.2004)

Date of receipt at the International Bureau: 16 March 2005 (16.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



GB05/386



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the application is now proceeding in the name as identified herein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed



Dated 1 March 2005





INVESTOR IN PEOPLE

~~GB0228792.7~~

GB0402654.8

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of:-

ORANGE SA  
Incorporated in France  
6 place d'Alleray  
75505 Paris Cedex 15  
France  
ADP No. 08924102001




The  
**Patent  
Office**

09 FEB 04 08:11:471-1 D03329  
P01/7700-0400-0402654.8 ACCOUNT CHA

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

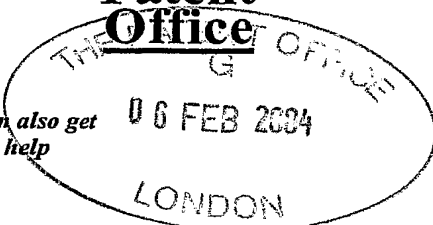

**The Patent Office**

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference J00046268GB

2. Patent application number  
(The Patent Office will fill this part in)

06 FEB 2004

0402654.8

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Orange Personal Communications Services Limited  
St. James Court, Great Park Road,  
Almondsbury Park, Bradley Stoke,  
United Kingdom

SECTION 60 (1977 ACT) APPLICATION FILED 01.09.04

066 490 32 00 2

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Telecommunications

5. Name of your agent (*if you have one*)

RGC Jenkins & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

26 Caxton Street  
London SW1H 0RJ  
United Kingdom

Patents ADP number (*if you know it*)

03966736001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (*see note f*)

Number of earlier UK application

Date of filing  
(*day / month / year*)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

YES

Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- Otherwise answer NO (*See note d*)

**Patents Form 1/77**

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description 11

Claim(s) 3

Abstract 1

Drawing(s) 13 + 13 *ll*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents (*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

*RGC Jenkins & Co.*

R.G.C. JENKINS & CO

Date 6 February, 2004

12. Name, daytime telephone number and e-mail address of person to contact in the United Kingdom

James Cross 020-7931-7141

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier application, you should also complete part 6 with the priority details.

## **Telecommunications**

### **Field of the Present Invention**

The present invention relates to apparatus for and methods of supporting mobile internet protocol (MIP) networks.

### **Background**

Whereas conventional 2G mobile networks, such as those conforming to the Global System for Mobile Communications (GSM) standards, have provided circuit-switched voice and data services to user's mobile stations (MSs), there is great momentum in the mobile telecommunications industry to deploy packet-switched mobile networks. Packet-switched mobile networks have significant advantages in terms of network and resource efficiency and also enable the provision of more advanced user services. With the convergence of fixed and mobile telecommunications networks, the Internet Protocol (IP), widespread in fixed networks, is the natural choice as the packet routing mechanism for mobile packet networks. Currently IP version 4 (IPv4) is in widespread use in the fixed network domain. However, it is expected gradually to migrate to IP version 6 (IPv6) which offers well-recognised benefits over IPv4, notably in terms of greatly increased address space, more efficient routing, greater scalability, improved security, Quality of Service (QoS) integration, support for multicasting and other features.

Particular examples of mobile packet-switched services currently being deployed include the General Packet Radio Service (GPRS) as implemented in both 2G GSM networks and in 3G Universal Mobile Telecommunications System (UMTS) networks (hereinafter referred to as GPRS networks). It is also expected that non-GPRS wireless access technologies, such as wireless Local Area Network (wLAN), will provide a flexible and cost-effective complement to GPRS for local broadband service access in some areas such as hotspots (conference centres, airports, exhibition centres, etc). Consequently mobile network operators will want to support roaming of mobile stations between GPRS and non-GPRS networks or subnetworks.

The reader is referred to the GPRS Service Description (release 1999) Technical Specification, referred to as 3G TS 23.060 v3.12.0 (2002-06) and available from the 3GPP website at [http://www.3gpp.org/ftp/specs/2002-06/R1999/23\\_series/](http://www.3gpp.org/ftp/specs/2002-06/R1999/23_series/), which provides a detailed service description for 2G (GPRS/GSM) and 3G (GPRS/UMTS)



mobile packet networks. The functionality of GPRS networks is also generally well-known, although further aspects will be described in detail below.

In order to access GPRS packet-switched services, a MS first performs a GPRS attach procedure with an SGSN (either a 2G GSM GPRS attach or a 3G UMTS GPRS attach). Authentication, and location updating procedures are performed, and, if successful, the GPRS attach procedure makes the MS available for paging via the SGSN and notification of incoming packet data. However, to actually send and receive packet data, the MS must have an allocated Packet Data Protocol (PDP) address (eg an IP address) and must activate at least one PDP context for use with that PDP address. Each PDP address for a MS may have one or more PDP contexts associated with it and data defining the PDP contexts is stored in the MS, the SGSN, and the GGSN. The process of PDP context activation makes the MS known not only to the SGSN, but also to the corresponding GGSN and inter-working with external data networks can commence.

While GPRS networks, having been designed from the start as mobile networks, have built-in mobility management (for MSs within the GPRS network) and roaming functionality (for MSs roaming between GPRS networks), work has also taken place in the Internet Engineering Task Force (IETF) to support mobility of IP user terminals in general. To this end, the IETF have developed the Mobile IP (MIP) protocols. MIP is designed to support mobility when mobile stations (or mobile nodes (MNs) in MIP terminology) move between IP networks with different subnet prefixes (macro-mobility). For example, MIP may be used to support mobility between a GPRS network and a non-GPRS network such as a wLAN network. Mobile IP is not expected to be used for mobility management within a network or subnetwork (micro-mobility) which is typically managed by access technology specific layer 2 mechanisms such as WCDMA handover.

There are two versions of MIP to correspond to the two versions of IP. MIP version 4 (MIPv4) is designed to provide IP address mobility for IP version 4 (IPv4) addresses, whereas the newer MIP version 6 (MIPv6) MIP is designed to provide IP address mobility for IP version 6 (IPv6) addresses. MIPv4 is described in the IETF Request For Comment (RFC) 2002 available at the IETF website <http://www.ietf.org/rfc/rfc2002.txt?number=2002>. Internet draft MIPv6 is described in

the IETF Internet draft "Mobility Support in IPv6" available at the time of writing on the IETF website at <http://www.ietf.org/internet-drafts/draft-ietf-mobileip-ipv6-24.txt> and referenced as draft-ietf-mobileip-ipv6-24.txt, dated 30 June 2004.

A scenario involving MIP roaming with routing optimisation is illustrated in Figure 1. A mobile node (MN) is allocated a home IP address (HAddr) in its Home Network (HN). Routing procedures in the HN ensure that wherever the MN is within the HN, an IP packet sent from a Correspondent Node (CN) over an IP network (IPN) will reach the MN. When the MN roams to a foreign network (FN), the MN is assigned a Care of Address (CoA) within the FN to which IP packets will need to be routed. However, the roaming must be transparent to the IP layer during a session, so that packets created by the IP layer of the CN will continue to carry the HAddr as the destination address.

Under the MIPv6 route optimisation protocol, the MN sends a binding update to the CN when roaming into the FN, to inform the CN of the CoA. The MIP layer of the CN then sets the destination address of subsequent packets in the session to the CoA, and places the HAddr in a Routing Header Type 2 extension header of the packet. At the MN MIP layer, the HAddr is retrieved from the Routing Header Type 2 extension header and used as the destination address in the corresponding packet passed to the IP layer.

Route optimisation is mandatory in MIPv6, but does not form part of MIPv4. An alternative roaming protocol without route optimisation is shown in Figure 2. An IP session is set up between the CN and the MN in its HN. The MN roams into the FN during the session, and sends a binding update to inform a Home Agent (HA) in the HN of the CoA in the FN. The HA forms part of a gateway between the IPN and the HN. In this example, the FN is a GPRS network connected to the IPN through a GGSN.

In response to the binding update, the HA sets up an IP tunnel to the CoA by intercepting any subsequent packets with the HAddr as the destination address and encapsulating them in packets with the IP address of the HA (HAddr) set as the source address and the CoA of the MN set as the destination address. The MIP layer of the MN decapsulates the packets and passes them to the IP layer so that the roaming is transparent to the IP layer. This tunnelling may be achieved using IPv6 Generic Packet Tunnelling Mechanism described in IETF RFC 2473.

In the uplink direction, the MN may not need to change the source and destination address of its packets after roaming into the FN, because the IP address of the CN has not changed. However, the FN may need to apply ingress filtering to outgoing packets, so that any packets with a source address not within the FN are blocked. This may be implemented by a gateway with a packet classifier to check the network prefix of the source address set to match that of the FN. As a result, packets from the MN, bearing the HAddr as the source address with a network prefix different from that of the FN, would be blocked.

To address this problem, the MIPv4 and MIPv6 standards include a reverse tunnelling protocol in which the MN sets up a tunnel in the uplink direction between its CoA and the HAAaddr. Since the uplink packets are encapsulated in packets carrying the CoA as the source address, and the CoA is within the FN, the ingress filter will allow the encapsulated packets to pass. The HA decapsulates the packets and forwards them to the CN. MIPv6 reverse tunnelling is described for example in the IETF Mobile IP Working Group Draft 'Mobility Support in IPv6', 29 October 2002, located at the time of writing at <http://www.ietf.org/internet-drafts/draft-ietf-mobileip-ipv6-24.txt>

In IPv4, the number of possible IP addresses is limited and it is therefore not desirable to allocate a unique CoA to each MN roaming in a FN. The MIPv4 standard therefore allows multiple MN's to share a CoA allocated to a Foreign Agent (FA) within the FN. Figure 3 shows the use of an FA in MIPv4. Packets are tunnelled between the HA and the FA at the CoA, and the FA routes the packets to the MN within the FN.

It is generally accepted that access to a network should be under the control of the operator or service provider of that network. Many important 3G functions, such as Service-Based Local Policies (SBLP) are based on this network-centric control principle. However, the existing MIPv6 standards work on an end-to-end basis that does not involve individual networks. For example, the MN interacts with its HA and its CN without notifying its current network, such as the foreign or visited network, that it is being camped on. The end-to-end control model of MIPv6 will be broken if foreign or visited networks enforce local policies.

### **Summary of the Present Invention**

According to one aspect of the present invention, there is provided a network entity in a foreign network visited by a mobile node, which acts as an intermediate node having direct contact with a correspondent node in a session between the mobile node and the correspondent node. The network entity may receive packets in the session addressed to the entity from the correspondent node and/or may send packets addressed to the correspondent node with an address of the entity as the source address. A care-of address allocated to the network entity may have a one-to-one relationship to the home address of the mobile node.

According to another aspect of the present invention, there is provided a network entity in a foreign network visited by a mobile node, which acts as an intermediate node in a session between the mobile node and the correspondent node and has a secondary care-of address with a one-to-one relationship to a care-of address of the mobile node in the foreign network.

In an embodiment of the present invention, a mobile home agent (MHA) or Secure Gateway is introduced into a network such a foreign or visited network. Data sent to or received from the mobile node is always routed through the mobile home agent.

### **Brief Description of Diagrams**

Figure 1 is a diagram illustrating MIP roaming using route optimization;

Figure 2 is a diagram illustrating MIP roaming without route optimization;

Figure 3 is a diagram illustrating MIP roaming with a foreign agent;

Figure 4a is a time diagram illustrating a first embodiment of the invention, in which data is sent from the CN to the MN via a tunnel from the HA to the MHA;

Figure 4b is a network diagram illustrating the first embodiment;

Figure 5a is a time diagram illustrating a second embodiment of the invention, in which data is sent from the CN to the MN via a tunnel from the CN to the MHA;

Figure 5b is a network diagram illustrating the second embodiment;

Figure 6a is a time diagram illustrating a third embodiment of the invention, in which data is sent from the CN to the MN via the MHA using address translation;

Figure 6b is a network diagram illustrating the third embodiment;

Figure 7a is a time diagram illustrating a fourth embodiment of the invention, in which data is sent from the MN to the CN via the tunnel from the MHA to the HA;

Figure 7b is a network diagram illustrating the fourth embodiment;

Figure 8a is a time diagram illustrating a fifth embodiment of the invention, in which data is sent from the MN to the CN via the tunnel from the MHA to the CN; and

Figure 8b is a network diagram illustrating the fifth embodiment;

### **Detailed Description of Embodiments of the Present Invention**

In the following description, the MHA is a network entity. For example, it may be co-located at a gateway of the FN. The operation of the MHA in different scenarios involving sending a packet to or from the MN will be described in the First to Fifth embodiments below.

#### **First Embodiment**

The first embodiment is a first alternative method of sending a packet from the CN to the MN. When the MN roams into the FN, it must register with the FN in order to send and receive packets through the FN. The MN is allocated a CoA in the FN.

As part of the registration process, shown in Figure 4a, the MN sends a first binding update (BU) at step 1a, to notify the MHA of the HAddr and HAAddr. In a case where the MHA is not already aware of the CoA, the MN also includes the CoA in the BU. However, if the MHA is co-located at the gateway to the FN, it may already have been notified of the CoA by an internal process within the gateway.

Also as part of the registration process of the MN, the MHA allocates itself a Secondary Care-of Address (SCoA) which has a one-to-one mapping with the HAddr of the MN, and sends a second BU at step 1b to notify the HA of the SCoA. This allows a tunnel to be set up from the HA to the MHA, as will be described below.

The roaming status of the MN is transparent to the CN, so the CN sends a packet to the MN with CNAddr as the source address and HAddr as the destination address. The process of sending packets from the CN to the MN is shown in Figures 4a and 4b. At step 1c, the CN sends the packet over the IPN, which routes it to the HN on the basis of the destination address. The packet is intercepted by the HA, which is aware of the roaming status of the MN and forwards the packet at step 1d through the tunnel to the MHA at the SCoA. In other words, the packet is encapsulated as follows:

Outer IP Header:      Src: HAAddr   Dest: SCoA

Inner IP Header      Src: CNAddr   Dest: HAddr

The MHA decapsulates the packet by stripping off the outer IP header, and sends the inner packet at step 1e to the MN. As this step is performed within the FN, it is immaterial that the destination address of the packet is not the current address of the MN. For example, the FN may route the packet to the MN using an Address Resolution Protocol (ARP) which discovers a medium access control (MAC) address for communication with the MN within the FN. The MAC layer operates between the IP layer and the physical layer and determines how packets are transported over the physical layer. As the present description is concerned primarily with the mobile IP layer, and MAC protocols are well known, the MAC layer will not be discussed further.

However, the IP layer of the MN will only deliver to the upper layers the packets addressed to HAddr, as the roaming status of the MN is transparent to the upper layers, although not to the mobile IP layer below it.

Steps 1c to 1e are repeated for each packet sent from the CN to the MN while the MN is in the FN.

### **Second Embodiment**

The second embodiment is a second alternative method of sending a packet from the CN to the MN. In this alternative, a tunnel is set up directly from the CN to the MHA, bypassing the HA. However, the HA may take part in setting up a session.

As part of the registration process, shown in Figure 5a, the MN sends a first binding update (BU) at step 2a, to notify the MHA of the HAddr and the CNAddr. In a case where the MHA is not already aware of the CoA, the MN also includes the CoA in the BU. However, if the MHA is located at the gateway to the FN, it may already have been notified of the CoA by an internal process within the gateway.

The MN may be aware of the CNAddr because it is initiating a session to the CN or was already involved in a session with the CN when the MN roamed into the FN. Otherwise, the MN may have been notified of the CNAddr by the CN, using for example the first embodiment.

Also as part of the registration process of the MN, the MHA allocates itself a Secondary Care-of Address (SCoA) which has a one-to-one mapping with the HA of the MN, and sends a second BU at step 2b to notify the CN of the SCoA. This allows a tunnel to be set up directly from the CN to the MHA, as will be described below.

The process of sending packets from the CN to the MN is shown in Figures 5a and 5b. The CN encapsulates a packet for sending to the MN, as follows:

Outer IP Header:      Src: CNAddr    Dest: SCoA

Inner IP Header      Src: CNAddr    Dest: HAddr

At step 2c, the CN sends the packet through the tunnel over the IPN, which routes the packet to the MHA at the SCoA. The MHA decapsulates the packet by stripping off the outer IP header, and sends the inner packet at step 2d to the MN.

Steps 2c and 2d are repeated for each packet sent from the CN to the MN while the MN is in the FN.

### **Third Embodiment**

The third embodiment is a third alternative method of sending a packet from the CN to the MN. It is similar to the second embodiment, except that packets are sent to the MHA without tunnelling, and the MHA performs destination address translation to convert the destination address from the SCoA to the HAddr.

As part of the registration process, shown in Figure 6a, the MN sends a first binding update (BU) at step 3a, to notify the MHA of the HAddr. In a case where the MHA is not already aware of the CoA, the MN also includes the CoA in the BU. However, if the MHA is co-located at the gateway to the FN, it may already have been notified of the CoA by an internal process within the gateway.

Also as part of the registration process of the MN, the MHA allocates itself a Secondary Care-of Address (SCoA) which has a one-to-one mapping with the HAddr of the MN, and sends a second BU at step 3b to notify the CN of the SCoA.

The MN may be aware of the CNAddr because it is initiating a session to the CN or was already involved in a session with the CN when the MN roamed into the FN. Otherwise, the MN may have been notified of the CNAddr by the CN, using for example the first embodiment.

The process of sending packets from the CN to the MN is shown in Figures 6a and 6b. The CN addresses a packet for sending to the MN with the source address as CNAddr and the destination address as SCoA. At step 3c, the CN sends the packet over the IPN, which routes the packet to the MHA at the SCoA.

The MHA performs destination address translation on the packet to replace SCoA by HAddr as the destination address of the packet, and sends the packet at step 3d to the MN.

Steps 3c and 3d are repeated for each packet sent from the CN to the MN while the MN is in the FN.

#### **Fourth Embodiment**

The fourth embodiment is a first alternative method of sending a packet from the MN within the FN to the CN. A reverse tunnel is set up between the MHA and the HA and packets are routed via the reverse tunnel to the CN.

As part of the registration process, shown in Figure 7a, the MN sends a first binding update (BU) at step 4a, to notify the MHA of the HAddr and HAAddr. In a case where the MHA is not already aware of the CoA, the MN also includes the CoA in the BU. However, if the MHA is located at the gateway to the FN, it may already have been notified of the CoA by an internal process within the gateway.

Also as part of the registration process of the MN, the MHA allocates itself a Secondary Care-of Address (SCoA) which has a one-to-one mapping with the HA of the MN, and sends a second BU at step 4b to notify the HA of the SCoA. This allows a reverse tunnel to be set up from the MHA to the HA, as will be described below.

The MN sends a packet addressed to the CN at step 4c. The MHA is configured as the default gateway or first hop for the MN, so that packets sent by the MN will always go through the MHA. When the packet arrives, the MHA checks the source address for a mapping to a SCoA in its cache. In this case, the source address is HAddr and a mapping is found. The packet is therefore forwarded through the reverse tunnel to the HA at step 4d. In other words, the packet is encapsulated as follows:

Outer IP Header:	Src: SCoA	Dest: HAAddr
Inner IP Header	Src: HAddr	Dest: CNAddr

The HA strips off the outer IP header and sends the inner packet through the IPN to the CN, at step 4e.

#### **Fifth Embodiment**

The fifth embodiment is a second alternative method of sending a packet from the MN within the FN to the CN. A reverse tunnel is set up directly between the MHA and the CN.



As part of the registration process, shown in Figure 8a, the MN sends a first binding update (BU) at step 5a, to notify the MHA of the HAddr and the CNAddr. In a case where the MHA is not already aware of the CoA, the MN also includes the CoA in the BU. However, if the MHA is located at the gateway to the FN, it may already have been notified of the CoA by an internal process within the gateway.

The MN may be aware of the CNAddr because it is initiating a session with the CN or was already involved in a session with the CN when the MN roamed into the FN. Otherwise, the MN may have been notified of the CNAddr by the CN, using for example the first embodiment.

Also as part of the registration process of the MN, the MHA allocates itself a Secondary Care-of Address (SCoA) which has a one-to-one mapping with the HAddr of the MN, and sends a second BU at step 5b to notify the CN of the SCoA. This allows a reverse tunnel to be set up directly from the CN to the MHA, as will be described below.

The MN sends a packet addressed to the CN at step 5c. The MHA is configured as the default gateway or first hop for the MN, so that packets sent by the MN will always go through the MHA. When the packet arrives, the MHA checks the source address for a mapping to a SCoA in its cache. In this case, the source address is HAddr and a mapping is found. The packet is therefore forwarded through the reverse tunnel to the CN at step 5d. In other words, the packet is encapsulated as follows:

Outer IP Header:      Src: SCoA      Dest: CNAddr

Inner IP Header      Src: HAddr      Dest: CNAddr

When the packet arrives at the CN, the mobile IP layer strips off the outer IP header and provides the inner packet to the IP layer.

### **Secure Binding**

Since the embodiments use a new functional element, the MHA, new types of secure binding are needed between the MHA and each of the elements with which it communicates, as follows.

Between the MN and the MHA, secure binding similar to that used for binding between the MN and the HA, as defined in MIPv6, can be adopted. Between the HA and the MHA, secure binding similar to that used between the Foreign Agent and the HA, as defined in MIPv4, can be used.

For binding between the CN and the MHA, secure binding is guaranteed by the MN if a secure binding is achieved between the MN and the MHA. The MHA trusts information about CN's only from those MN's with which the MHA has established secure bindings.

### **Ingress Filters**

In the first to third embodiments described above, roaming of the MN into the FN during a session may cause the destination address of packets entering the FN to change from the HAddr to the SCoA during a session. If a destination-based packet filter were set up at the gateway of the FN, such as a traffic flow template (TFT), the change of destination address could lead to packets being blocked. As there is a one-to-one mapping between the HAddr and the SCoA and the SCoA is used as the destination address for the encapsulated packets, the problem can be avoided by the MHA updating the filter to link the SCoA to the HAddr and thereby apply the same filtering policy to packets addressed to the SCoA.

### **Implementation details**

The embodiments have been described in functional terms known *per se* to the skilled person, who understands that the functional elements may be implemented in a variety of different ways. For example, the functions may be performed by computer programs executed at the CN, HA, MHA and MN by suitably arranged apparatus including hardware, firmware and/or software. Known MIPv6 systems may be modified by the addition of suitable computer programs, or the modification of existing computer programs, to implement the invention. These programs may be stored on carriers, including without limitation non-volatile storage media such as removable discs, flash memory, and electrical or electromagnetic signals. Further implementation details need not be included in this description, but will be readily supplied from the knowledge of the skilled reader.

**Claims**

1. A method of operating a network entity (MHA) at an intermediate node between a mobile node (MN) in a foreign network (FN) and a correspondent node (CN), the method comprising sending (2b; 3b; 5b; 5d) a packet, addressed to the correspondent node (CN), from the network entity (MHA).
2. The method of claim 1, wherein the packet is a binding update (2b; 3b; 5b).
3. The method of claim 2, including allocating to the mobile node (MN) a care-of address (SCoA) within the foreign network (FN), wherein the binding update (2b; 3b; 5b) indicates the care-of address (SCoA).
4. The method of claim 3, wherein the network entity (MHA) subsequently receives (2c; 3c), in a session between the correspondent node (CN) and the mobile node (MN), one or more session packets with the correspondent node address (CNAddr) as the source address and the care-of address (SCoA) as the destination address, and forwards (2d; 3d) the session packets to the mobile node (MN).
5. The method of claim 4, wherein the session packets are tunnelled (2c) from the correspondent node (CN) to the network entity (MHA) and decapsulated prior to forwarding (2d) to the mobile node (MN).
6. The method of claim 4, wherein the network entity (MHA) translates the destination address of the session packets to a home address (HAddr) of the mobile node (MN) prior to forwarding (3d) to the mobile node (MN).
7. The method of claim 2 or claim 3, wherein the network entity (MHA) subsequently sends (5d), in a session between the mobile node (MN) and the correspondent node (CN), one or more session packets in a tunnel from the network entity (MHA) to the correspondent node (CN), with the care-of address (SCoA) as the source address and the correspondent node address (CNAddr) as the destination address.
8. The method of claim 7, wherein the tunnelled session packets have a home address (HAddr) of the mobile node (MN) as an inner source address.

9. The method of claim 1, wherein the packet is a session packet (5d) in a session between the mobile node (MN) and the correspondent node (CN).
10. A method of operating a network entity (MHA) at an intermediate node between a mobile node (MN) in a foreign network (FN) and a correspondent node (CN), the method comprising receiving (2c; 3c) from the correspondent node (CN) a packet addressed to the network entity (MHA) and having a correspondent node address (CNAddr) as the source address.
11. The method of claim 10, wherein the packet is a session packet in a session between the correspondent node (CN) and the mobile node (MN), and the network entity (MHA) forwards (2d; 3d) the session packet to the mobile node (MN).
12. The method of claim 11, wherein the session packet is tunnelled (2c) from the correspondent node (CN) to the network entity (MHA) and the network entity (MHA) decapsulates the session packet prior to forwarding (2d) to the mobile node (MN).
13. The method of claim 11, wherein the network entity (MHA) translates the destination address of the session packet to a home address (HAddr) of the mobile node (MN) prior to forwarding (3d) to the mobile node (MN).
14. A method of operating a network entity (MHA) at a node of a packet-switched data network, wherein the network entity (MHA) acts an intermediate node between a mobile node (MN) having a care-of address (CoA) in a foreign network (FN) and a correspondent node (CN), the method comprising allocating a secondary care-of address (SCoA) corresponding uniquely to a home address (HAddr) of the mobile node (MN).
15. The method of claim 14, including sending (2b; 3b; 5b) a binding update indicating the secondary care-of address (SCoA) to the correspondent node (CN).
16. The method of claim 14, including sending (4b) a binding update indicating the secondary care-of address (SCoA) to a HA in a HN of the mobile node (MN).
17. The method of claim 14, including translating the destination address of one or more session packets, received from the correspondent node (CN) in a session between the correspondent node (CN) and the mobile node (MN), from the secondary care-of address (SCoA) to the home address (HAddr) prior to forwarding (3d) to the mobile node (MN).

18. A method according to any preceding claim, wherein the network entity (MHA) is located at a gateway to the foreign network (FN).
19. A method according to claim 18, including configuring the network entity (MHA) as the default gateway of the mobile node (MN).
20. A method according to any preceding claim, including configuring the network entity (MHA) as the first hop of the mobile node (MN).
21. A method according to any preceding claim, wherein the network entity (MHA) and the mobile node (MN) use MIPv6 protocols.
22. A method substantially as herein described with reference to Figures 4a and 4b of the accompanying drawings.
23. A method substantially as herein described with reference to Figures 5a and 5b of the accompanying drawings.
24. A method substantially as herein described with reference to Figures 6a and 6b of the accompanying drawings.
25. A method substantially as herein described with reference to Figures 7a and 7b of the accompanying drawings.
26. A method substantially as herein described with reference to Figures 8a and 8b of the accompanying drawings.
27. A computer program arranged to implement a method according to any preceding claim.
28. A computer program product comprising a computer program according to 27, recorded on a carrier.
29. Apparatus arranged to perform the method of any one of claims 1 to 26.

**Abstract****Telecommunications**

In a MIPv6 network, a mobile home agent (MHA) in a foreign network (FN) acts as an intermediate node between a mobile node (MN) and a correspondent node (CN) and allocates itself a secondary care-of address (SCoA) different from the care-of address (CoA) of the mobile node (MN), with a one-to-one relationship between the secondary care-of address (SCoA) and the home address (HAddr) of the mobile node.

[Figure 4b]



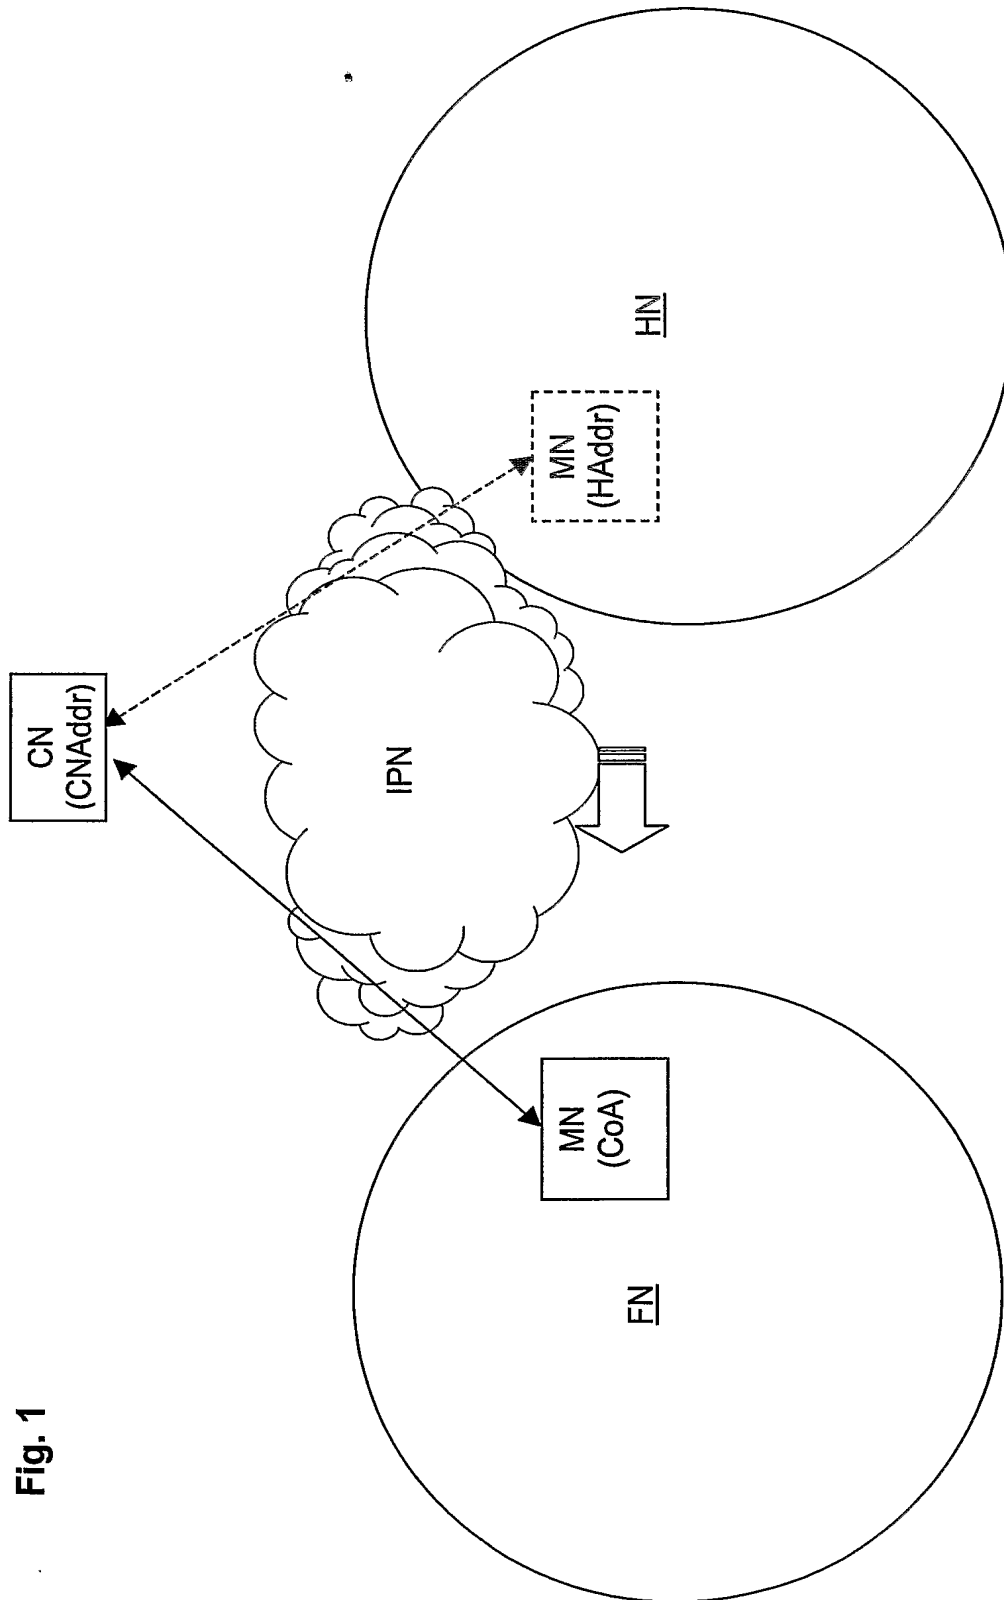


Fig. 1





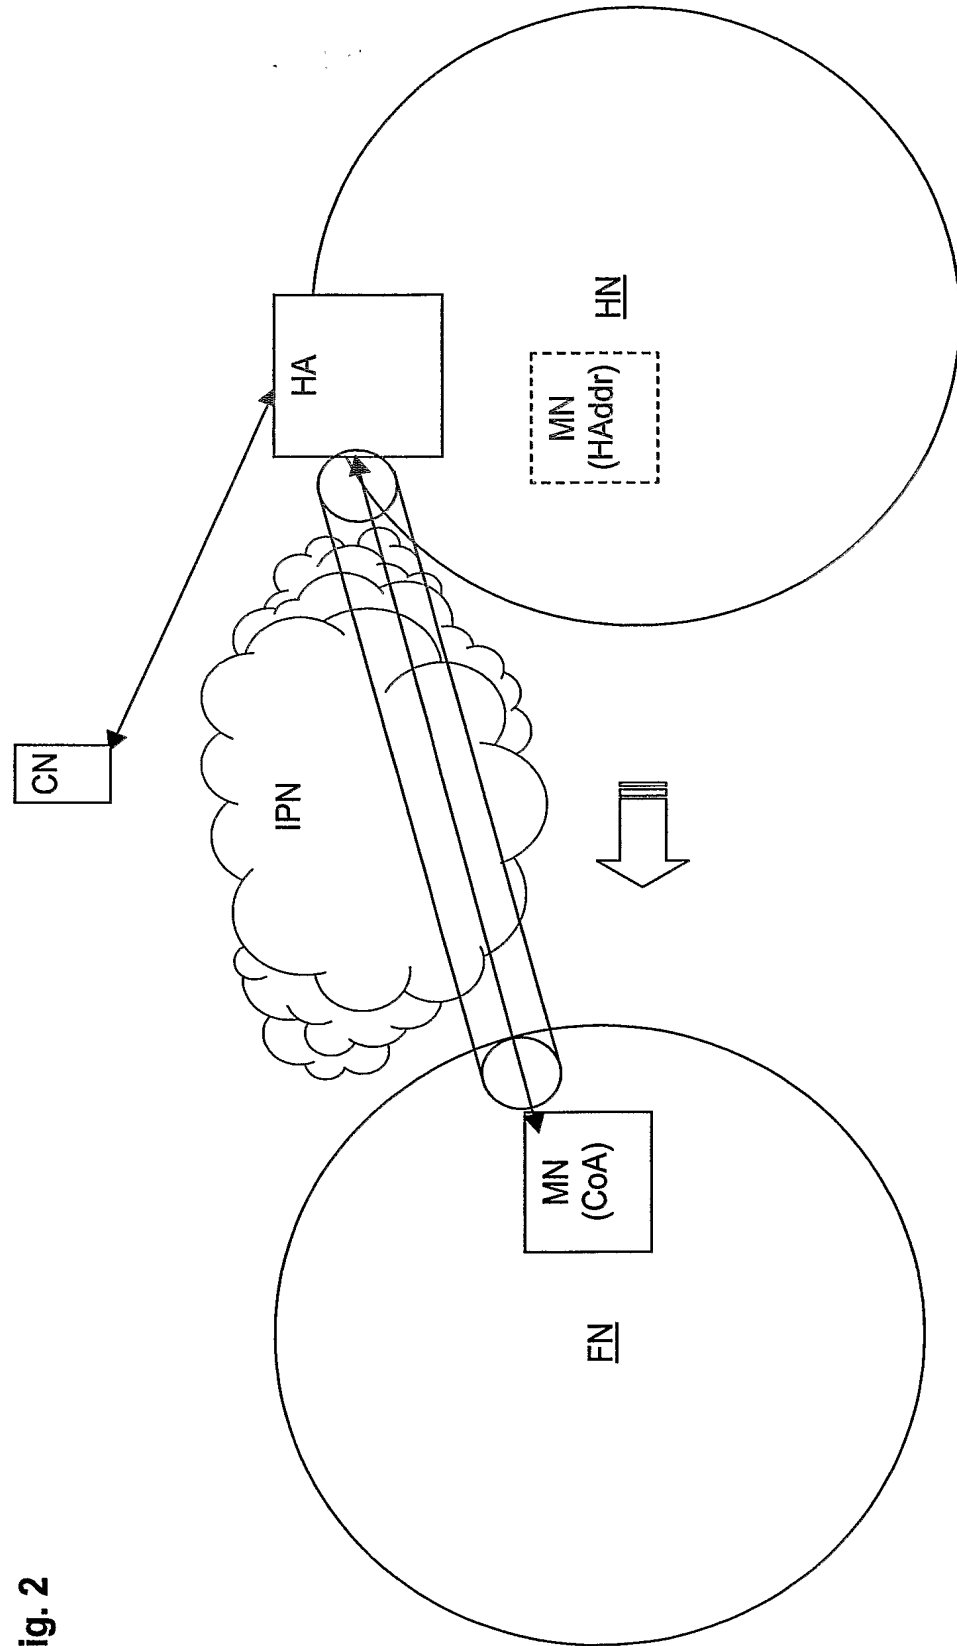


Fig. 2



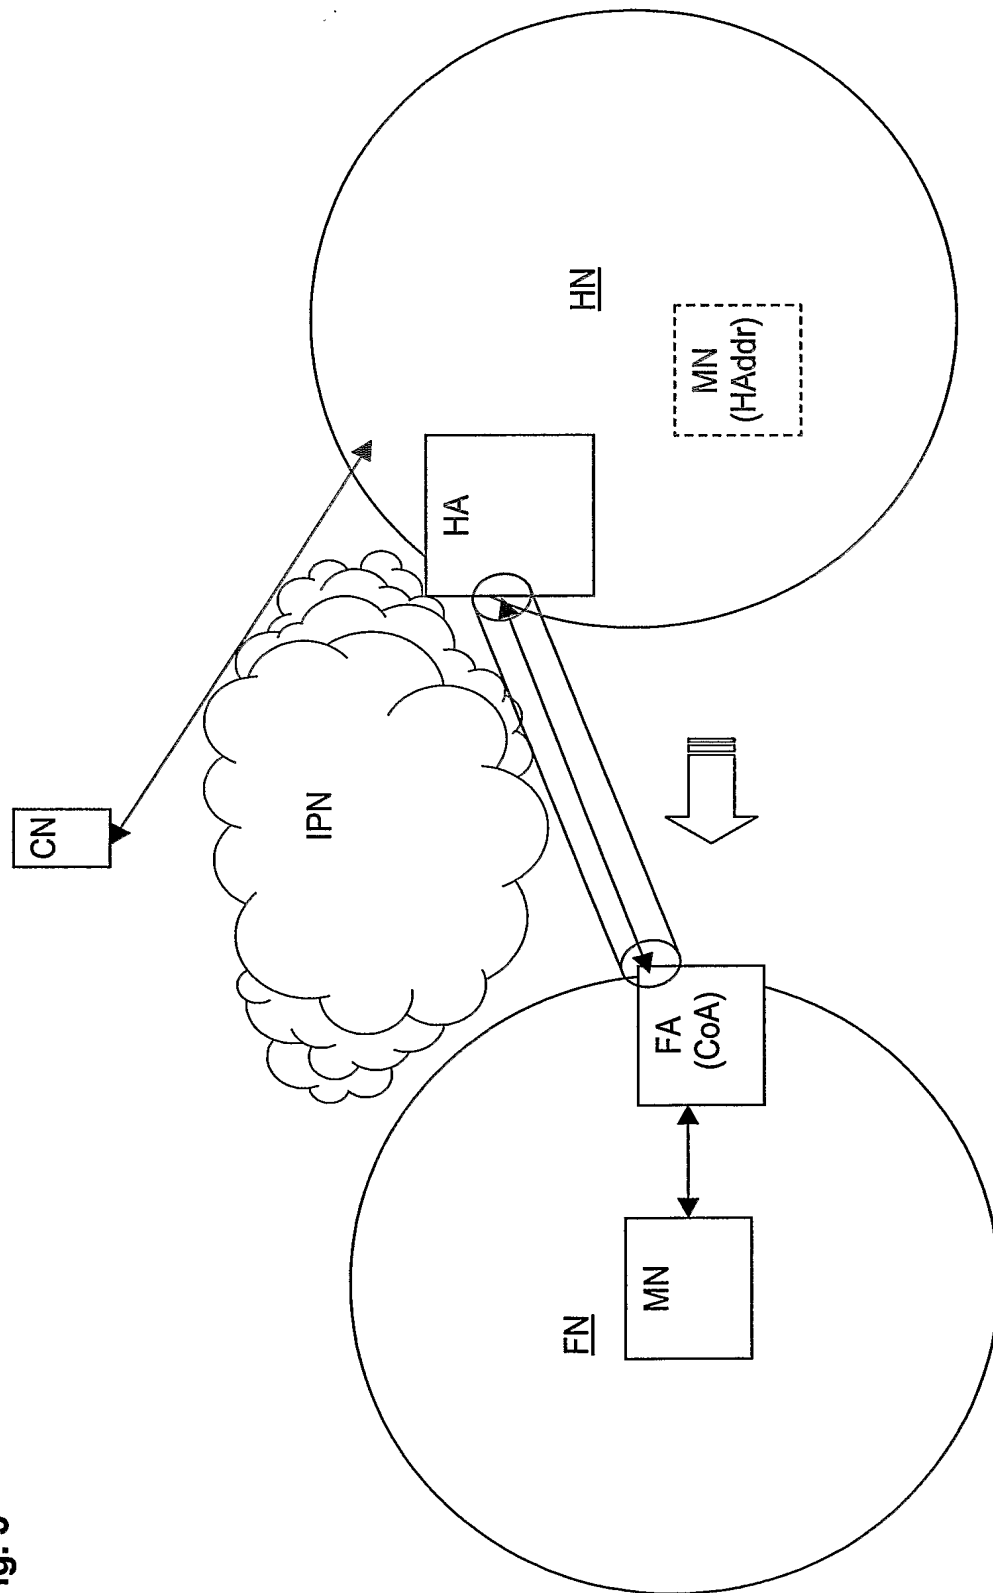


Fig. 3



Fig. 4a

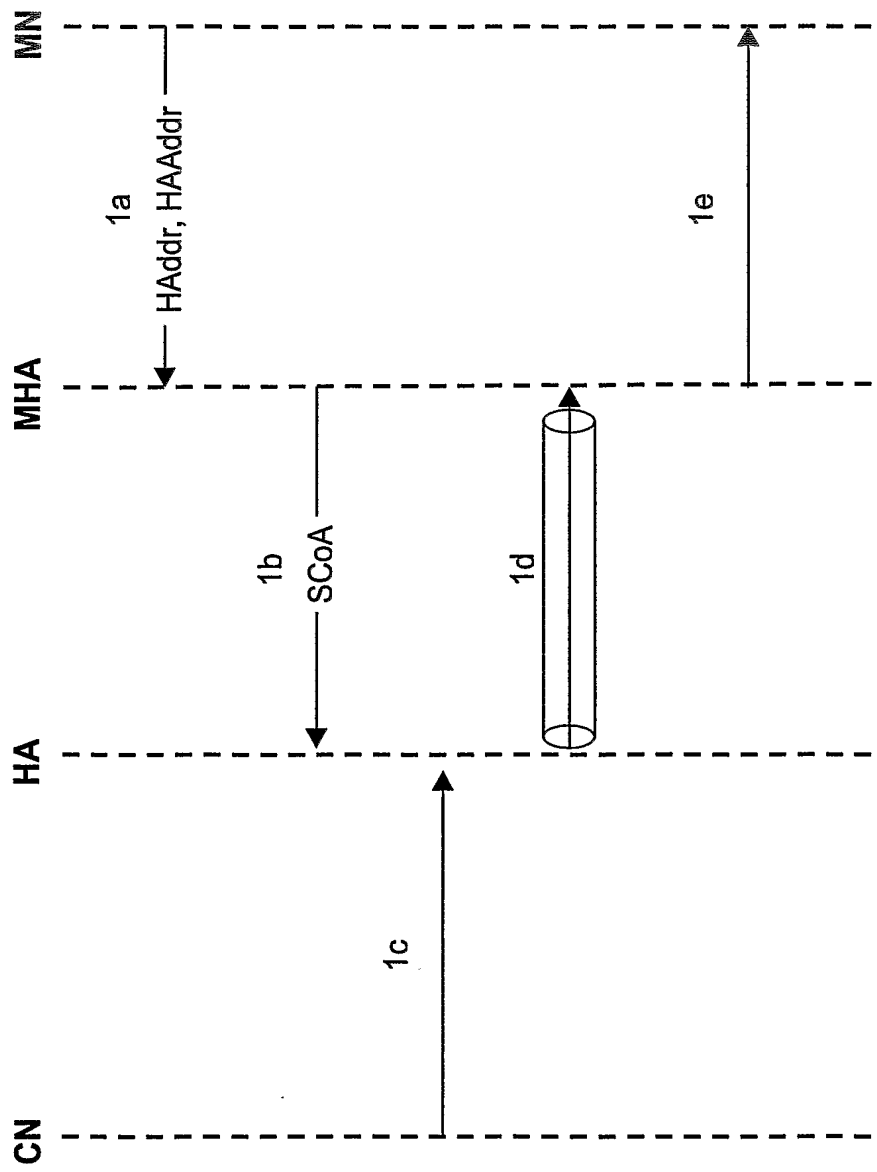




Fig. 4b

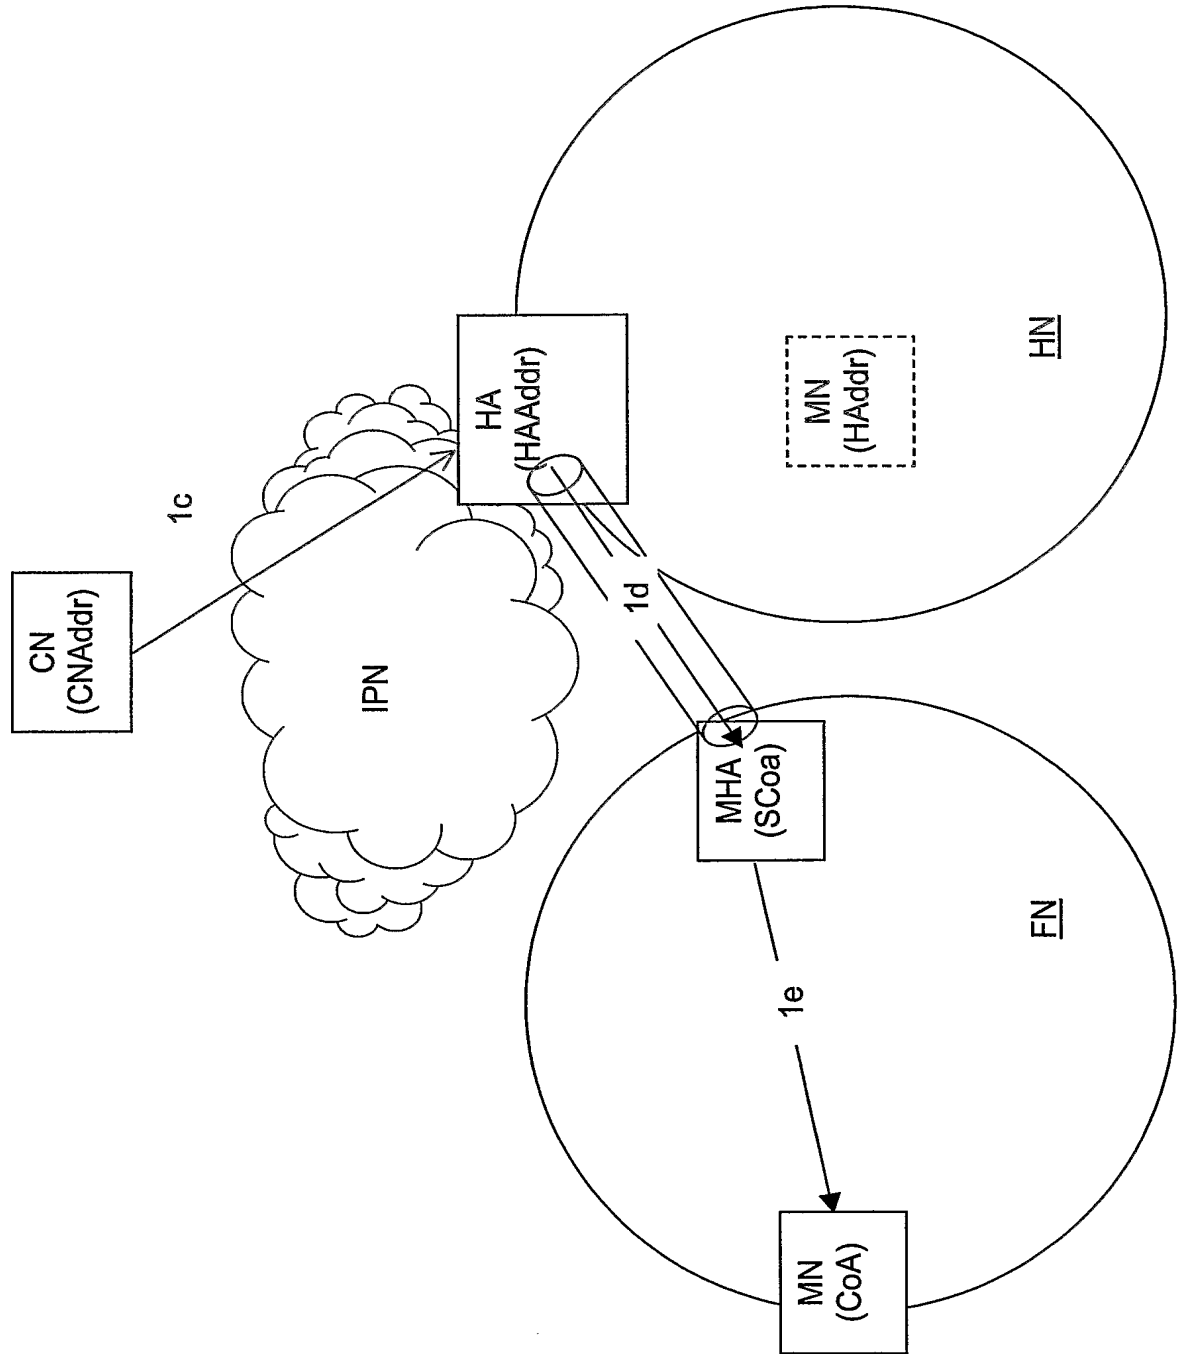
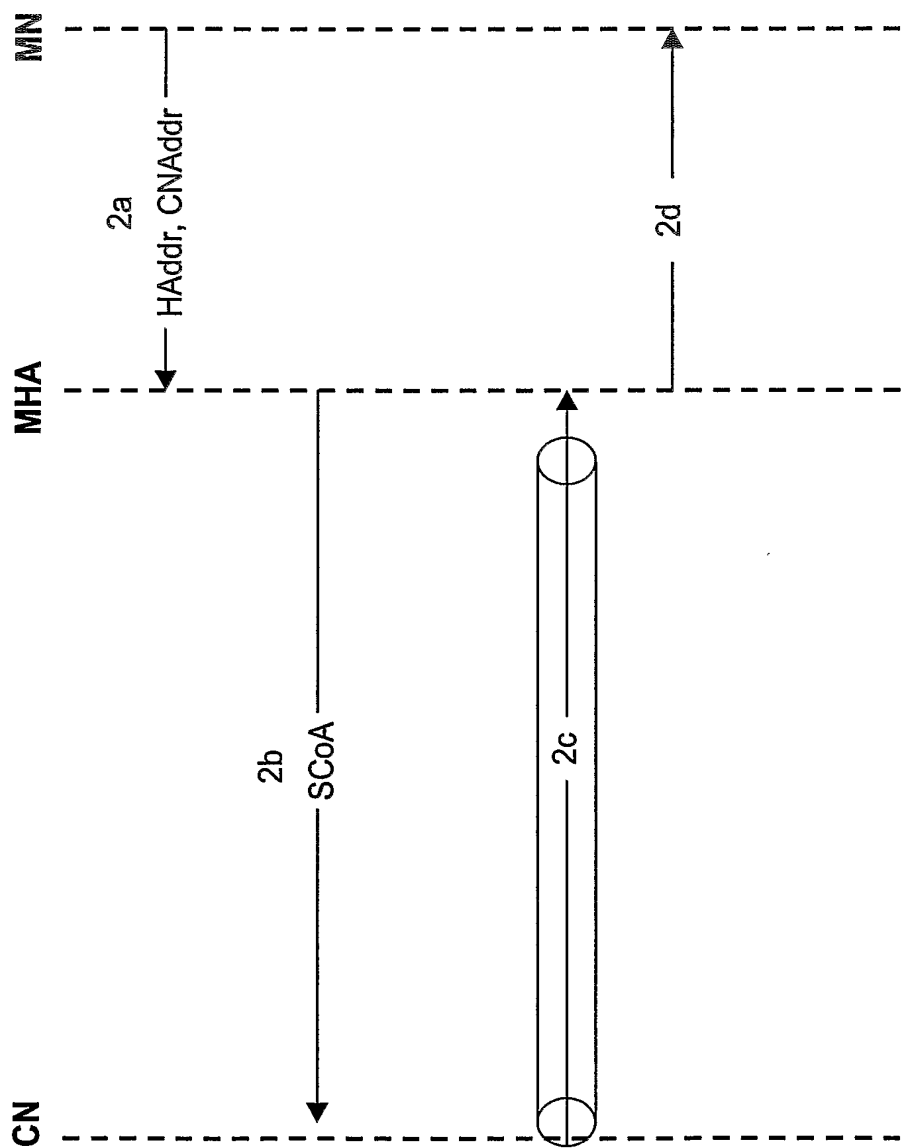






Fig. 5a





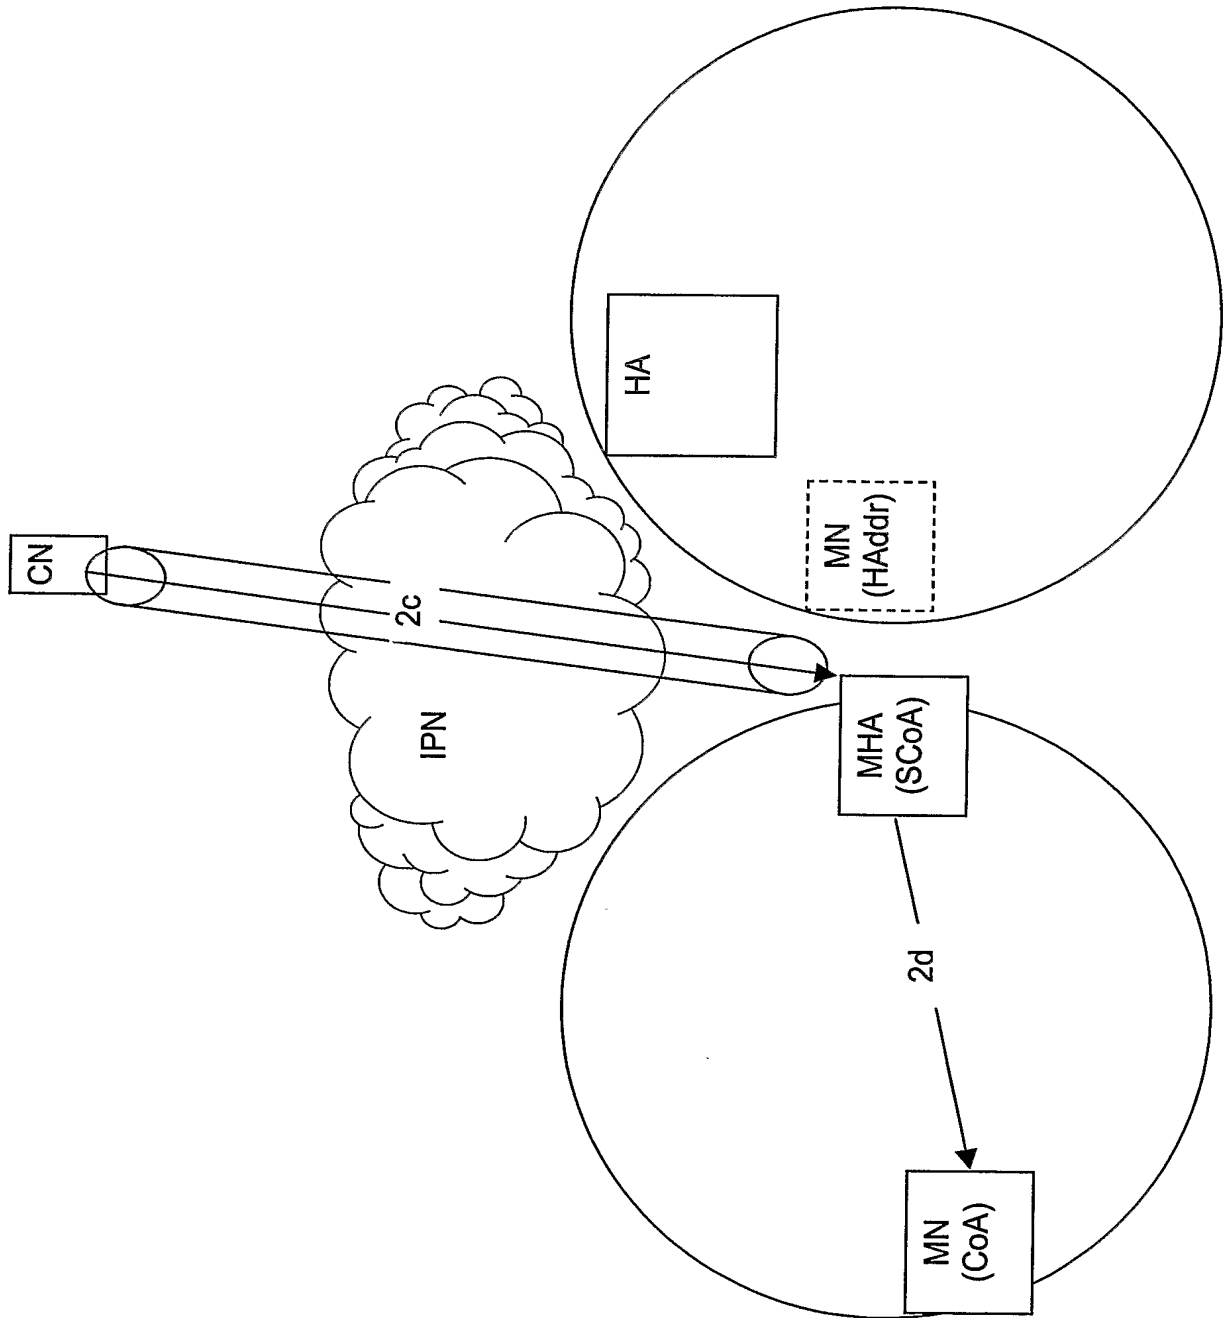
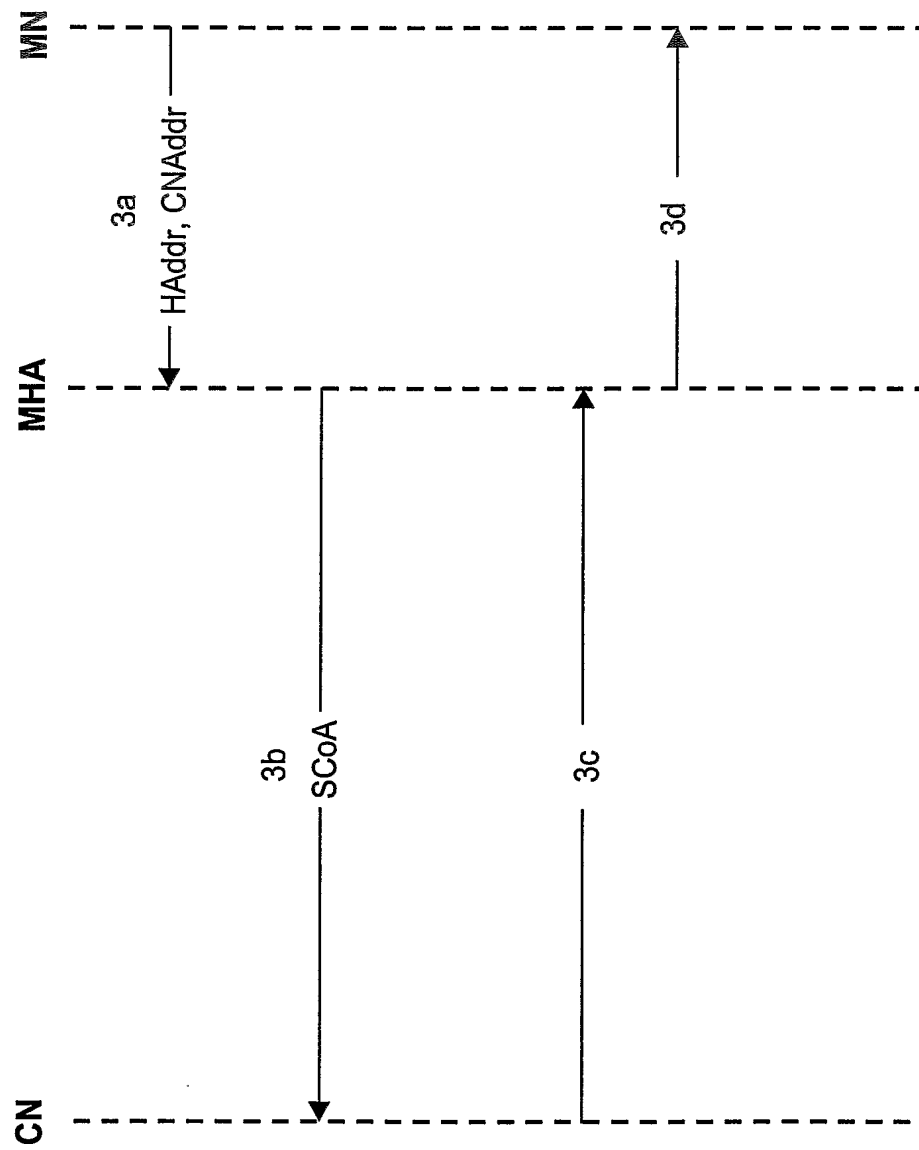


Fig. 5b



Fig. 6a





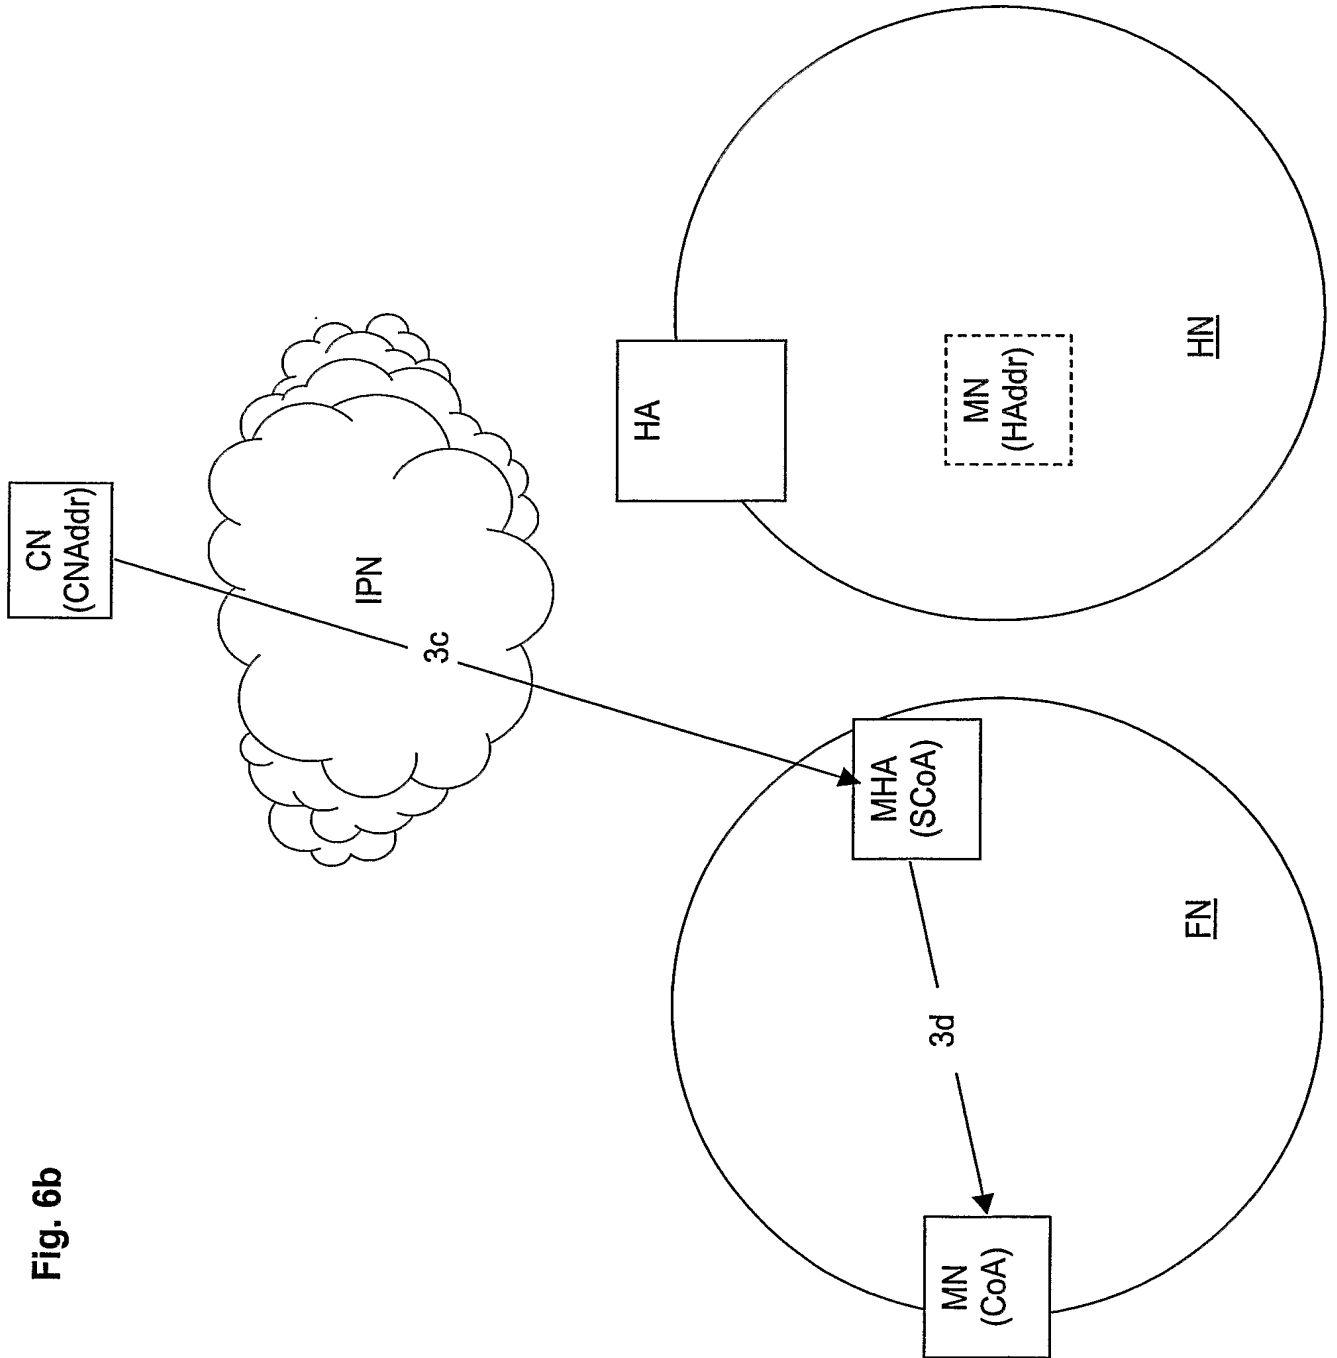
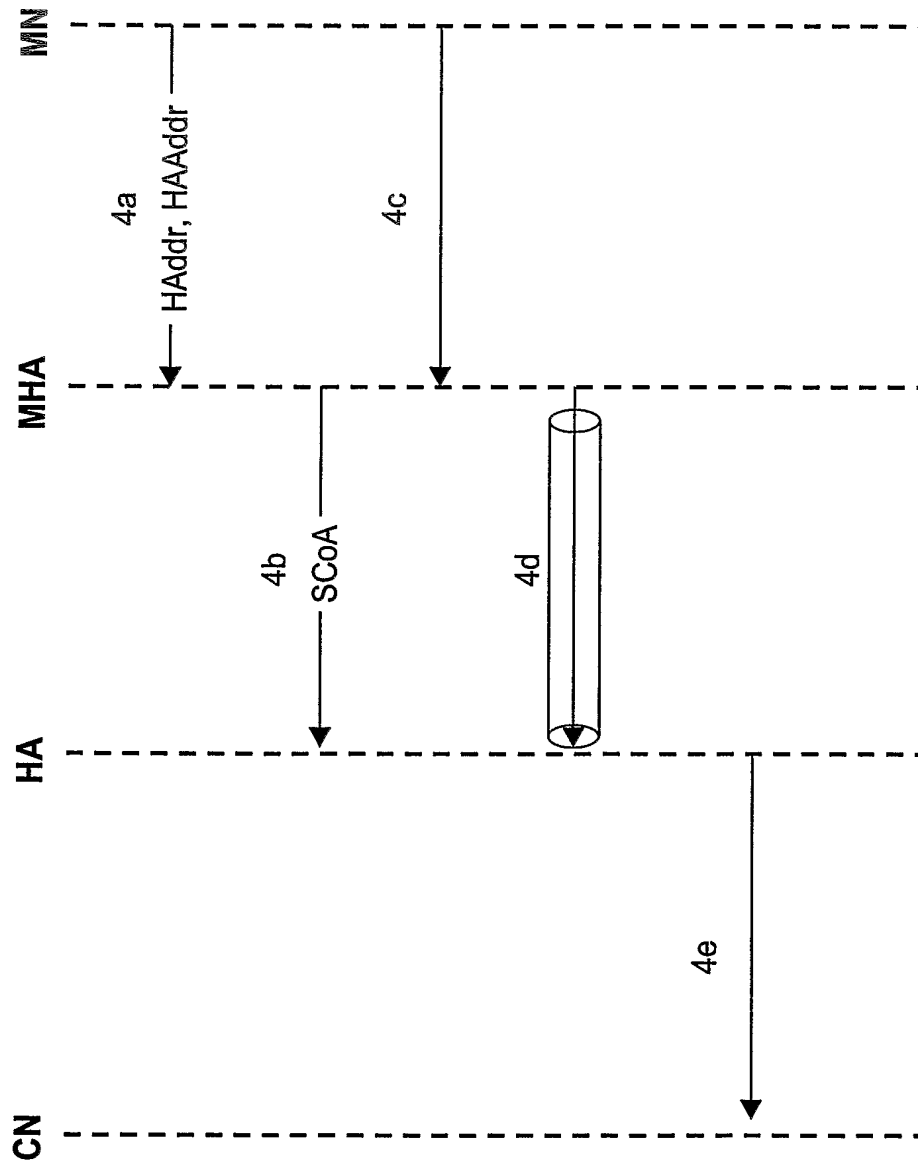






Fig. 7a





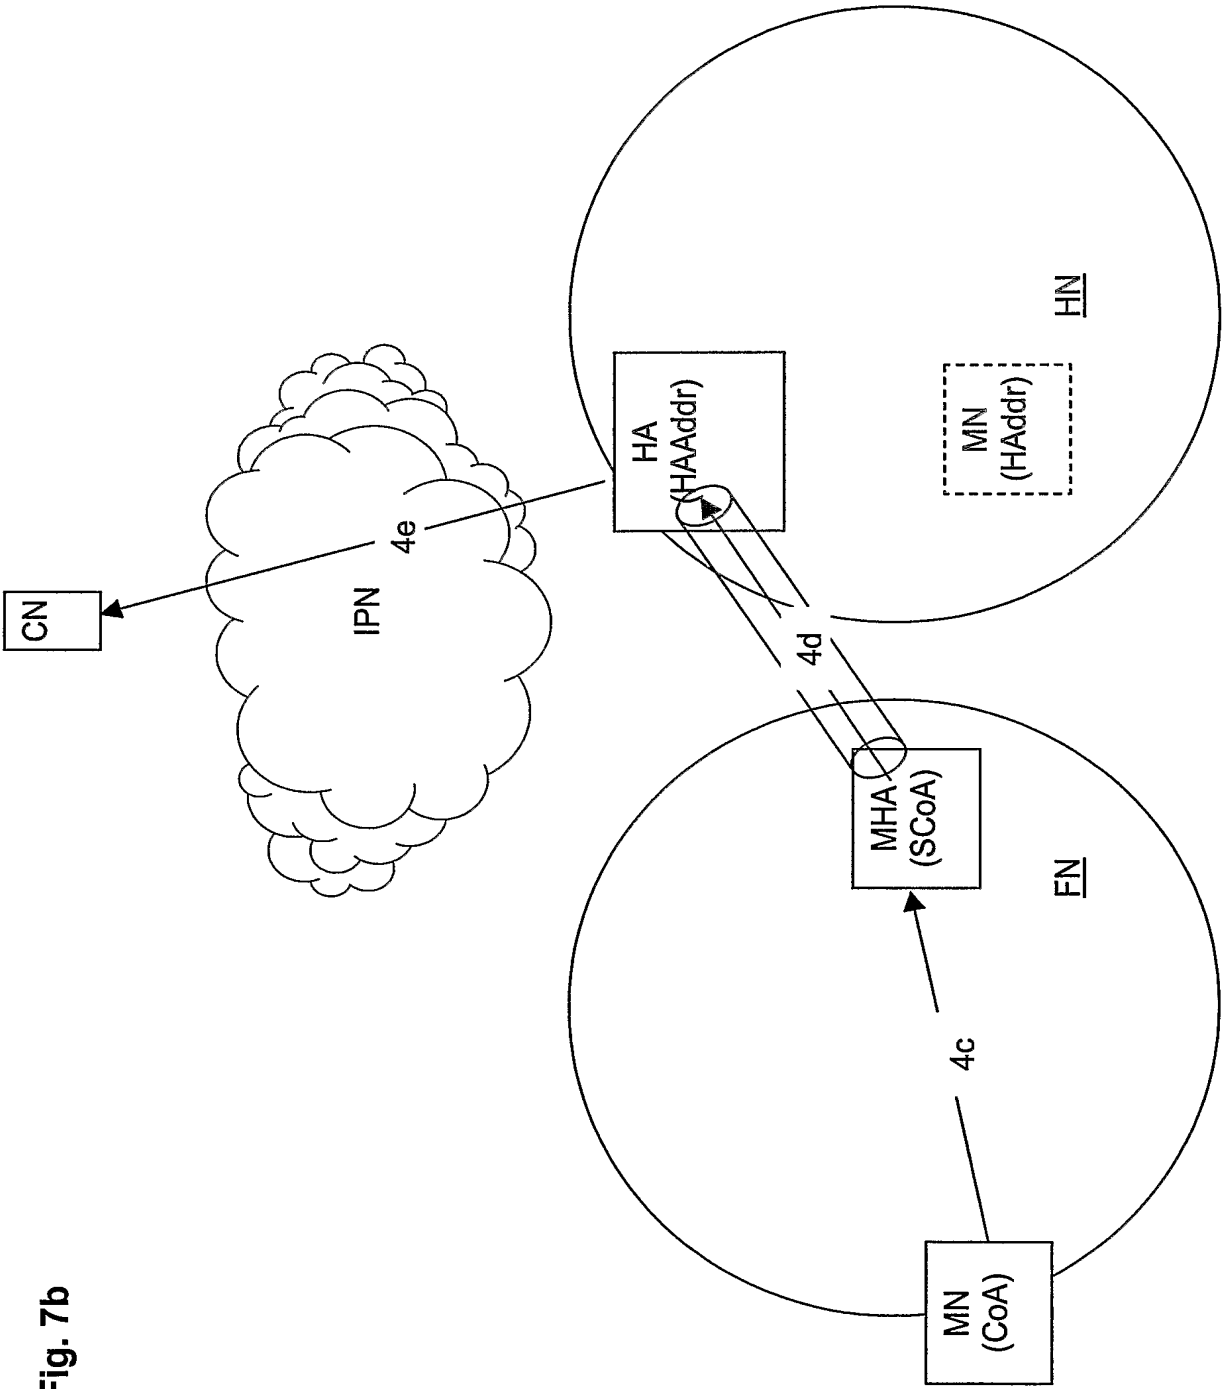
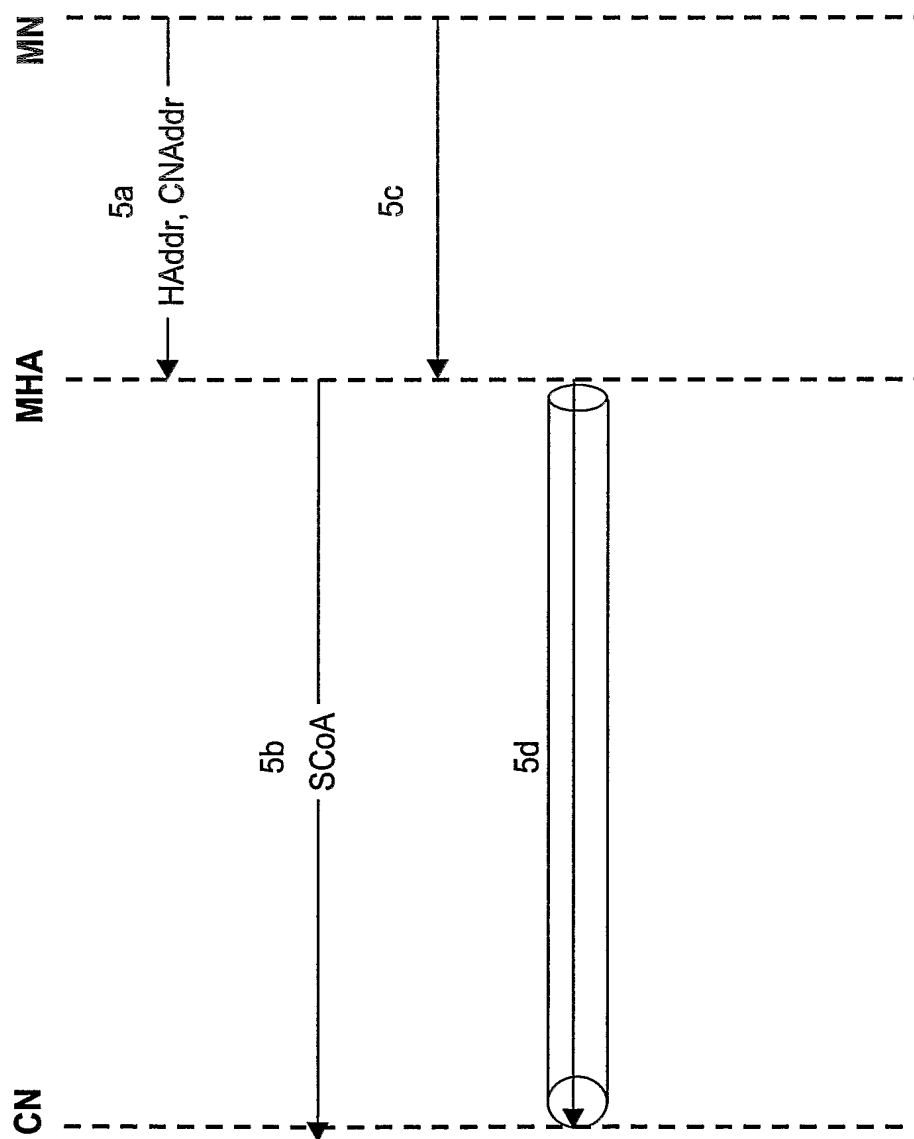


Fig. 7b



Fig. 8a





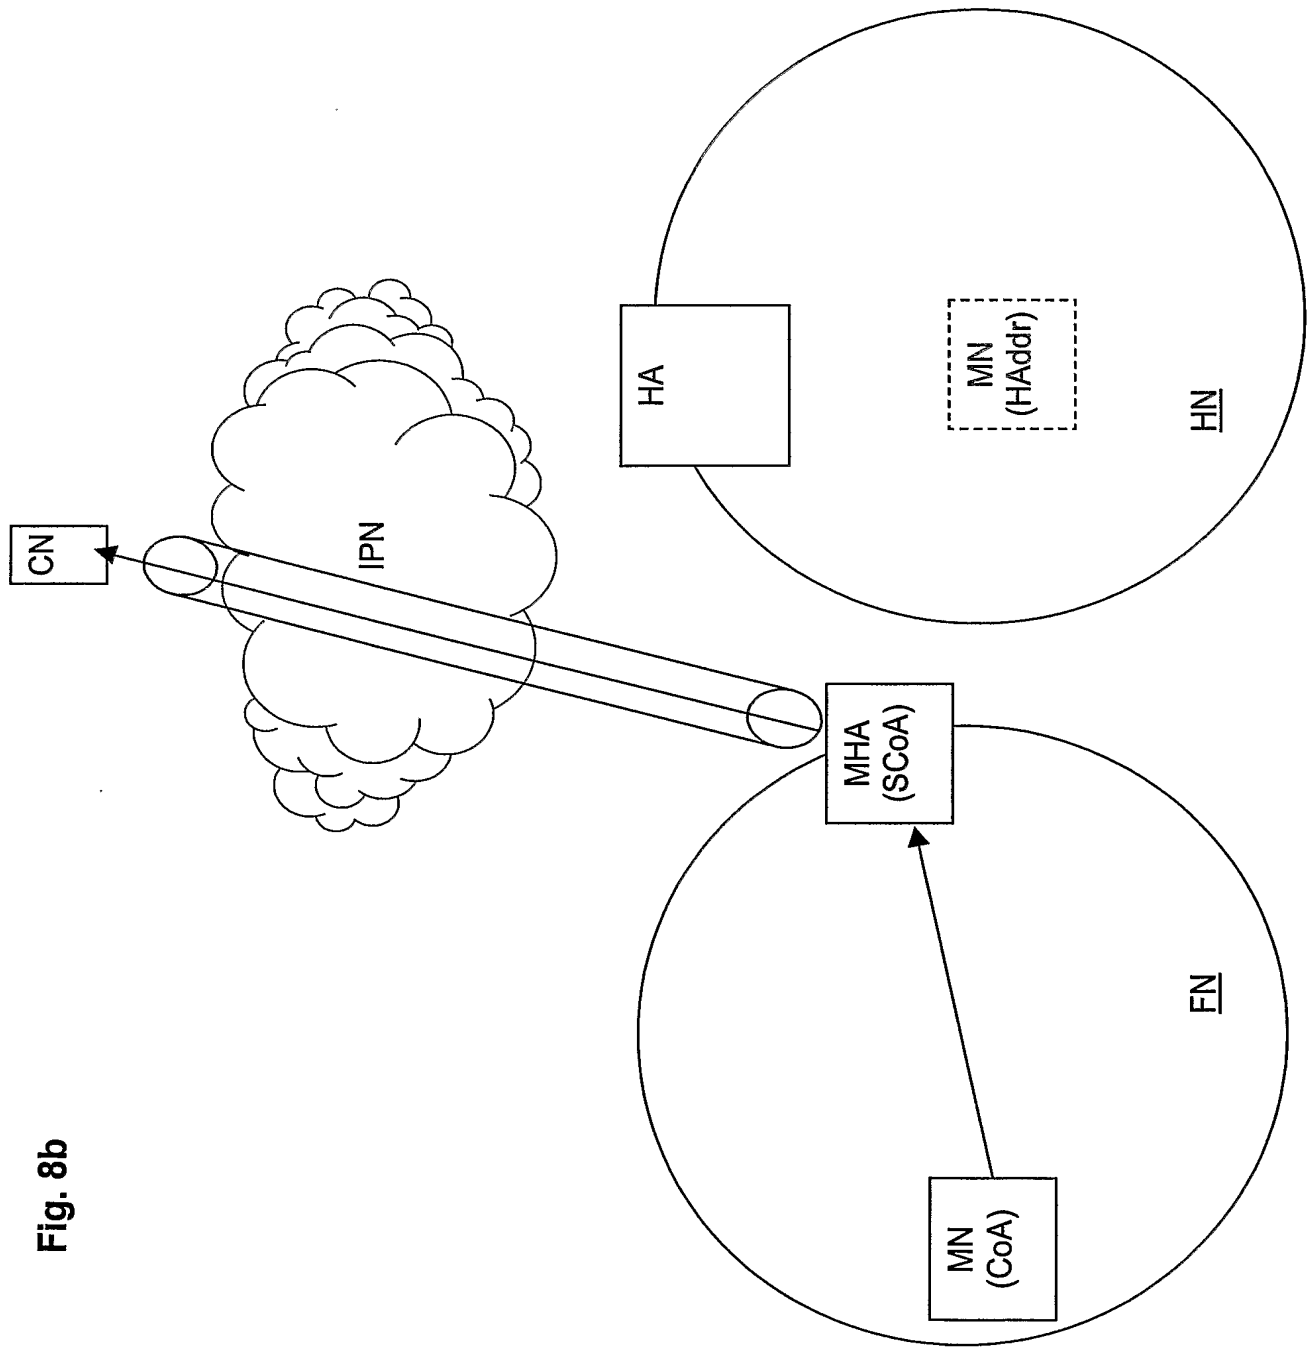


Fig. 8b



